

ALL ANGLE GROUNDING CLAMPS
from **SALISBURY**

Salisbury All Angle Grounding Clamps

Reach difficult angles up to 75° left or right.

Great for overhead or substation applications.

Salisbury's all angle clamps are just the thing when the approach angle to the conductor or bus is too extreme to use regular "C" Type or flat jaw clamps. Adjustable for up to 75° left or right, all angle clamps simplify grounding in these difficult applications.


All angle clamps are available in two sizes, both featuring a serrated three-finger jaw configuration to safely and securely grip conductors and buss. A large size, bronze body, aluminum jaw model is also offered.

Meets ASTM F855 standards.


21866



21864

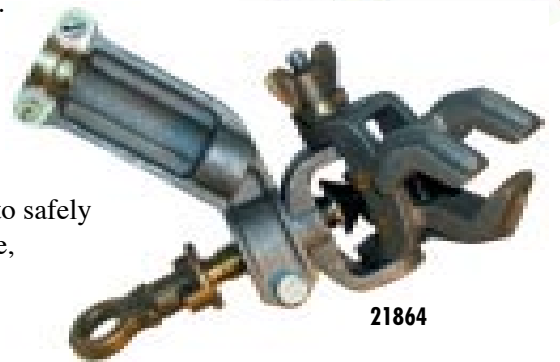

21865

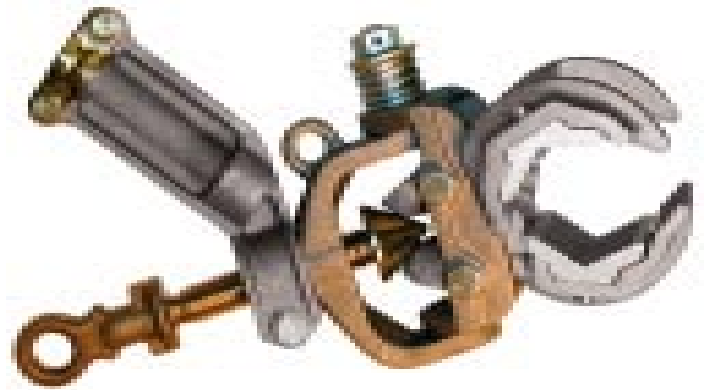

Cat. No. & Description	Material	Installation Torque (in.-lbs)	Cable Termination	ASTM Grade / Class	Jumper Cable Range	Main Contact Max	Range Min	Continuous Current rating	Weight ea. lbs. (kgs)
21864 All Angle Clamp	Aluminum	250	5/8-11UNC Threaded Stud	5/B	#2 - 4/0 Cu	954 ACSR (1.2")	#2 (.258")	400 Amps	2.4 (1.09)
21865 All Angle Clamp	Aluminum Jaws Bronze Body	250	5/8-11UNC Threaded Stud	5/B	#2 - 4/0 Cu	2" IPS (2.88")	#2 (.258")	400 Amps	4 (1.81)
21866 All Angle Clamp	Bronze	250	5/8-11UNC Threaded Stud	5/B	#2 - 4/0 Cu	2" IPS (2.88")	#2 (.258")	400 Amps	5.6 (2.54)